



Home

History

Contacts

Distributors

Installation

Ordering Info

Technical Info

OG Supply Inc.


EMAIL

Non-Asbestos Boiler Gaskets

Gaskets that will give you all of the advantages of an asbestos gasket without the health risks.


For maximum sealing on new and old flanges, use the max, **Blue-Max®**.

Standard Shapes and sizes are available for immediate shipment.

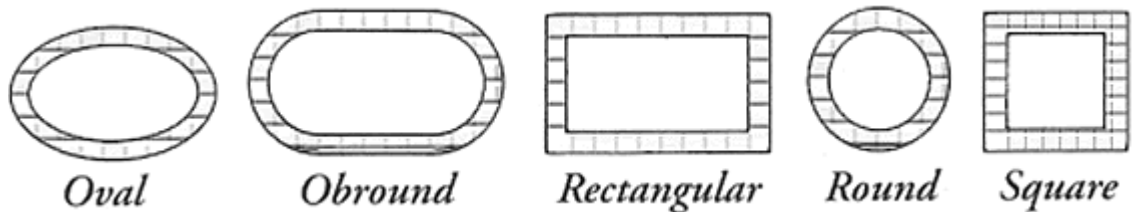

When ordering **OVAL**, **OBROUND** and **RECTANGULAR** gaskets, specify inside dimensions of (**W**), and (**L**), flange width (**FW**), Thickness (**Thk**) and shape.

L = Major I.D. **W** = Minor I.D. **FW** = Flange Width **Thk** = Gasket Thickness

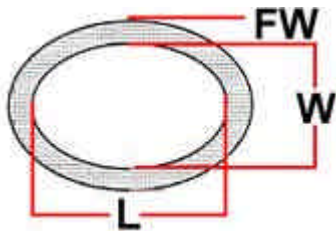

i.e. please order by **W x L x FW x Thk x Shape**
 12" x 16" x 1" x 1/4" x Oval

When ordering **ROUND** and **SQUARE** gaskets, specify inside dimension of (**W**), flange width (**FW**), Thickness (**Thk**) and shape.

i.e. please order by **W x FW x Thk x Shape**
 12" x 1" x 1/4" x Round

Standard thickness is 1/4" unless otherwise specified

Custom Gaskets can be manufactured to customers specifications.